

HY-1107



FEATURES

- **Outward** Swinging Door
- Factory assembled and tested
- Matte Finish
- Safety Grab Bars
- Accessory Rack
- Heated Whirlpool Jets
- Body Massage Jets
- Hand-held Shower
- Deep Molded Seat
- Luxurious Head Rest Pillow
- Comfortable Arm Support
- Waterproof Walk-in Door
- Thermostatic Valve
- Drain Access Panel
- Easy Installation (4-6 Hrs)
- Free standing or built in
- Pressure Balance Valve (optional extra)
- Limited Life Time Warranty on the Door Seal

Optional Surround set available



Surround is Optional

TECHNICAL INFORMATION


- **Materials:** Acrylic Composite
- **Power Supply:** 110V/ 8.2 amps
- **Dimensions:** 51 x 29 x 42 IN
- **Water Usage:** 50-55 Gallons

PLUMBING REQUIRMENTS

- Unit is equipped with flexible, metal braided ½ inch water supply hose with ½ female threaded connectors
- Need to install hot and cold shutoffs with ½ male threaded nipples (not included)
- 1-1/2 drain with 90 degree angle
- **Thermostatic valve may need to be recalibrated**
- It is advised to have tub onsite before preparing drain location.

ELECTRICAL REQUIREMENTS

- 110 volt, 15-20 amp GFCI breaker or plug into GFCI outlet/ 12-2 wire .

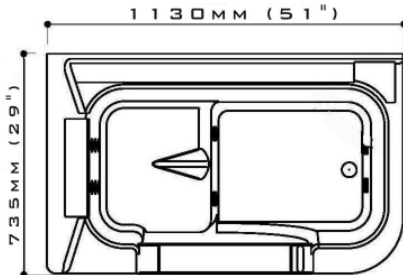

GENERAL INFORMATION

- **Note:** It is advised to have the tub onsite before preparing drain location.
 - Unit **must** be leveled in its permanent position and all feet must be on the ground to fully support the tub
- Manufacturer reserves the right to change specs or features at anytime. Please check to confirm details.**
1-866-783-2661

HY-1107-L



HY-1107-R

