



WS-109-R

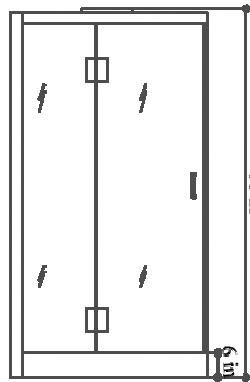

FEATURES

- Factory tested
- Corner Unit
- Left/Right Models Available
- Polished Aluminum Trim
- Tempered glass walls and doors
- Swinging door
- FM Radio
- Steam Aromatherapy Cup
- Accessory Rack
- Body Massage Jets
- Rainfall Shower
- Thermostatic Faucet
- Waterproof Oak Shower Grid
- Hand-held Shower w/ Height-adjustable Bracket
- Removable Waterproof Oak Seat
- Pressure Balance Valve (optional extra)
- Control Panel
- Circulation Fan
- Chromatherapy/LED Color Lighting
- Self-Cleaning Steam Generator

TECHNICAL INFORMATION

- **Materials:** Aluminum, Tempered Glass
- **Power Supply:** 220 volt, 3KW
- **Steam Ready:** 2-5 MIN
- **Dimensions:** 48 x 36 x 88 IN

PLUMBING REQUIRMENTS

- The unit is equipped with hot and cold, metal braided ½ inch water supply hose with ½ national pipe thread.
- Need to install hot and cold shutoffs with ½ -male national pipe thread (not included).
- Supply hoses are to connect from the faucet manifold on the unit to the shutoff valves.
- All water jet features are pre plumbed with reinforced braided flexible supply hose
- All fixtures and fittings should be checked for tightness as they may have been loosened during transport

ELECTRICAL REQUIREMENTS

- Steam box- 3 KW
- 1 dedicated 12-2 wire with 20 amp GFCI breaker
- There is a length of wire from the steam box supplied to connect to the active power source.

GENERAL INFORMATION

- Units come broken down in panels and are assembled with screws, nuts and bolts on site. All seams to be caulked with 100% silicone at room temperature. (no latex caulking)
- **Note:** All shower bases need to be leveled in its final resting position, mark the placement, then pull base out and begin assembly. It is advised to have base onsite before preparing drain location. Access panel area advised. **Manufacturer reserves the right to change specs or features at anytime. Please check to confirm details. 1-866-783-2661**